




HARGROVE GAS LOG CRACKLING PINE CONE KIT

INSTALLATION INSTRUCTION

THE CRACKLING PINE CONE IS DESIGNED TO ADD TO THE REALISM OF YOUR HARGROVE GAS LOG SET BY PRODUCING POPPING AND CRACKLING SOUNDS THAT SIMULATE A WOOD FIRE.

STEPS FOR PROPER INSTALLATION

1. Place a teaspoon of crackling material in the hole in the Pine Cone.
2. Put the Pine Cone on the the Gas Logs in a place where the flames will come in direct contact with it. THE HOLE IN THE PINE CONE MUST BE FACING THE BACK OF THE FIREPLACE! If it is facing forward the crackling material will pop out of the fireplace.
3. Allow approximately 5 minutes for the crackling material to begin to pop. The popping should last for around 20 minutes or more. If no crackling starts move the pine cone to more direct contact with the flame.

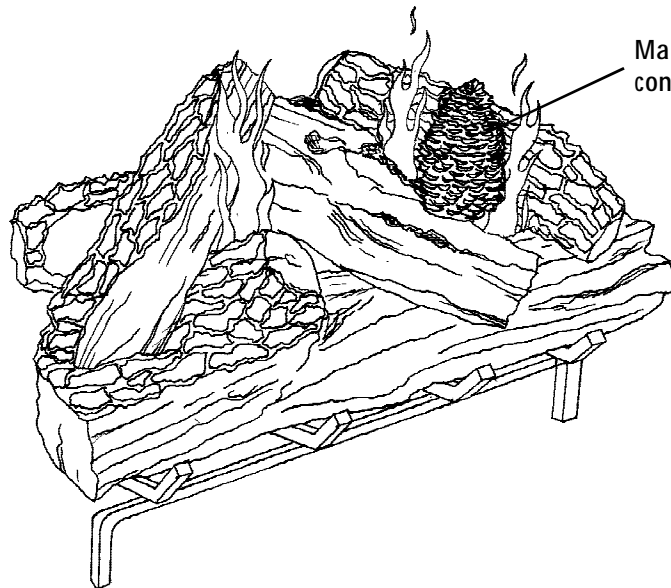

Make sure the flames come in contact with the pine cone.

IMPORTANT!

IF NOT HANDLED PROPERLY THE CRACKLING MATERIAL WILL POP OUT OF THE FIREPLACE WHEN IT REACTS TO THE HEAT. BELOW IS A LIST OF STEPS THAT SHOULD BE FOLLOWED:

1. Turn the hole in the pine cone to the back of the fireplace so the crackling material doesn't pop toward the opening of the fireplace.
2. Do not put any crackling material in the ember bed.
3. Keep the fireplace screen closed during gas log operation.