



# HARGROVE GAS LOG GRATE TOP COAL BED INSTALLATION INSTRUCTION

## FOR ALL STANDARD SETS WITH SINGLE FRONT LOG

THE GRATE TOP COAL BED IS DESIGNED TO CREATE A GLOWING EMBER BED BETWEEN THE FRONT AND BACK LOG.

### STEPS FOR PROPER INSTALLATION

When starting this installation the grate should be in the fireplace per the installation instructions in your gas log set.

1. Lay the longer section of the (GT) Grate Top on the Pedestal of the (PG) Pedestal Grate. The shorter section of the GT should rest on the tines of the PG. (Fig.1)
2. The largest log is the front log. It should be placed on the front of the grate with the flat unfinished side facing the back of the fireplace.
3. Pull the GT forward so that it comes in contact with the front log.
4. The second longest log is the back log. It is positioned on the pedestal of the PG with the flat side down.
5. At this time the GT should be exposed between the front and back log. Pinch off pieces of the Embers and cover the GT so that it is not seen.  
\*If the embers are packed too tightly or are piled too high the burner flames may be diverted to the outside area of the GT. If this happens turn your gas log burner off and break up and/or remove some of the embers.
6. The remaining logs are the top logs. These logs are placed diagonally across the bottom logs and can be arranged to create the most realistic flame patterns.  
\*When lighting the burner the flames coming through the GT may be partly blue in color. If this happens move the embers around to create more air space for the flame to travel through and let the set burn a few minutes and the flames will turn yellow.

Fig. 1


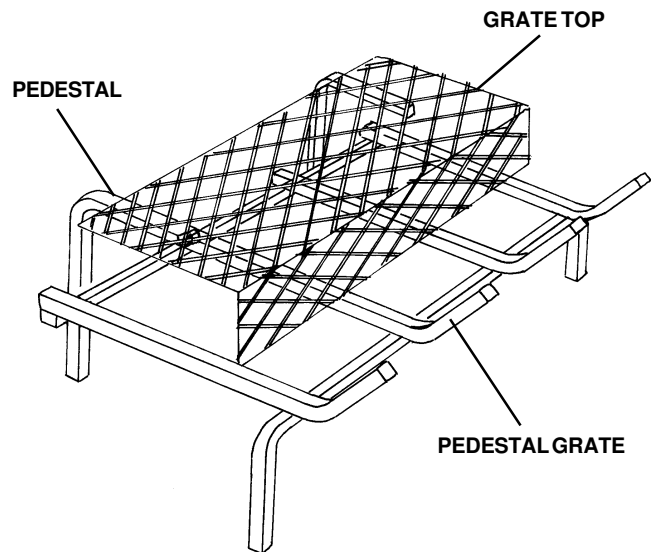


Fig. 2



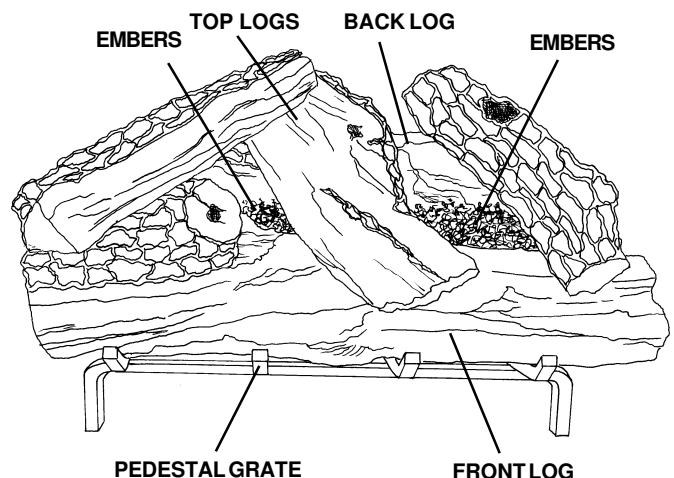

# HARGROVE GAS LOG GRATE TOP COAL BED INSTALLATION INSTRUCTIONS

## ***FOR THE HEARTLAND WALNUT (EMBER VIEW FRONT LOG)***

THE GRATE TOP COAL BED IS DESIGNED TO CREATE A GLOWING EMBER BED BETWEEN THE FRONT AND BACK LOG.

### **STEPS FOR PROPER INSTALLATION**

**When starting this installation the grate should be in the fireplace per the installation instructions in your gas log set.**

1. Place the (GT) Grate Top on the (PG) Pedestal Grate, the shorter side will be to the back and the longer section of the GT will be at an angle towards the front of the fireplace. Match the cut-outs of the GT with the back tines of the PG, then push the GT towards the back of the PG so that the tines will fit into the cut-outs of the GT. (Fig.1)

2. The Heartland Walnut has a two piece front log. This will allow you to view the embers through the front logs. They should be placed on the front of the grate with the flat unfinished side facing the back of the fireplace.

3. The second longest log is the back log. It is positioned on the back tines of the PG with the flat unfinished side facing down.


4. At this time the GT should be exposed between the front and back log. Pinch off pieces of the Glowing Embers and cover the GT so that it is not seen.

\*If the embers are packed too tightly or are piled too high the burner flames may be diverted to the outside area of the GT. If this happens turn your gas log burner off and break up and/or remove some of the embers.

5. The remaining logs are the top logs. These logs are placed diagonally across the bottom logs and can be arranged to create the most realistic flame patterns.

\*When lighting the burner the flames coming through the GT may be partly blue in color. If this happens move the embers around to create more air space for the flame to travel through and let the set burn few minutes and the flames will turn yellow.

**Fig. 1**

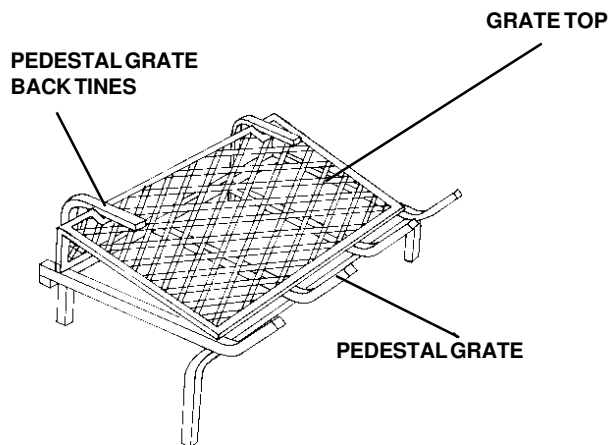

**Fig. 2**

